

# Max-Flo XL™

YEARS OF WARRANTY



TOTALLY PARTNER +1



## Simplicity

- Optimised design and hydraulics
- Quarter-turn opening cover for easy maintenance
- Union fittings provided for easy installation
- Suitable for all types of pool up to 80 m<sup>3</sup>





Easy-to-service design provides simple installation




See-through strainer cover



Drain plugs for an easy wintering

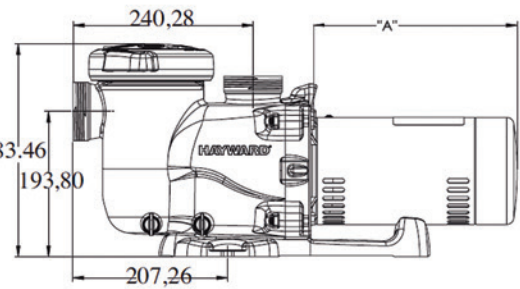

Pressure (mbar)

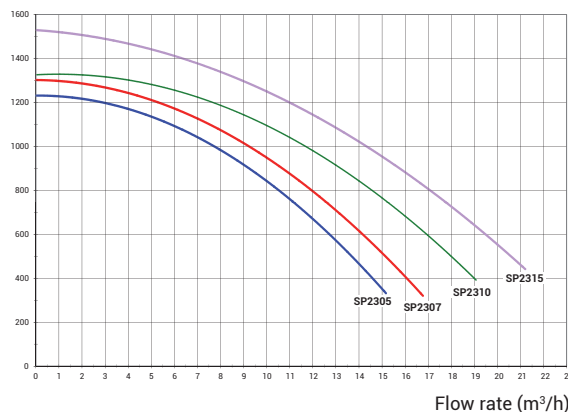

SINGLE PHASE  
MAX FLO XL™

Power (HP)	Flow rate*	In/Out	Weight	Side A	Input Power P1	Output Power P2	Item
0.5	10.5 m <sup>3</sup> /h	50 mm	12.9 kg	220 mm	640 W	430 W	SP2305XE81
0.75	12 m <sup>3</sup> /h	50 mm	12.9 kg	220 mm	640 W	430 W	SP2307XE111
1	14.5 m <sup>3</sup> /h	50 mm	13.9 kg	247 mm	975 W	720 W	SP2310XE161
1.5	17 m <sup>3</sup> /h	50 mm	14.07 kg	247 mm	1100 W	790 W	SP2315XE221

THREE PHASE  
MAX FLO XL™

0.75	11.5 m <sup>3</sup> /h	50 mm	11.4 kg	216 mm	640 W	430 W	SP2307XE113
1	14.5 m <sup>3</sup> /h	50 mm	12.02 kg	216 mm	975 W	690 W	SP2310XE163
1.5	17 m <sup>3</sup> /h	50 mm	13.2 kg	247 mm	945 W	750 W	SP2315XE223

\* under 8 m water column pressure